

Manufacturers of High Quality PVC-U Windows & Doors
 Aspen Way, Yalberton Ind. Est.,
 Paignton, Devon TQ4 7QR
 Tel: 01803 666633 Fax: 01803 663030
 Web: www.interframe.co.uk
 Email: sales@interframe.co.uk

Customer: Date : / /

Address:

.....

Phone: (.....)

Fax: (.....)

Quote Reference

CQ

CONSERVATORY ORDER FORM

N.B. Page 2 & ALL sections marked ▲ MUST be completed to avoid delivery date being extended

Ref: Date Required: / /

Post Code/Area for this Conservatory: Base Plan Required Y N

SYSTEM REQUIRED: VEKA 58mm Y VEKA 70mm FS Y

▲ DOES FRAME HEIGHT INCLUDE CILLS? Y N

PAGE 1

VIEWED FROM OUTSIDE

FRONT ELEVATION

• USE ONLY INTERNAL FRAME DIMENSIONS *

▲ DOES FRAME HEIGHT INCLUDE CILLS? Y N

▲ DOES FRAME HEIGHT INCLUDE CILLS? Y N

LEFT SIDE ELEVATION

VIEWED FROM OUTSIDE

RIGHT SIDE ELEVATION

VIEWED FROM OUTSIDE

Customer:


Address:

.....

Phone: (.....)

Fax: (.....)

▲ (Please Mark * Gutter Position)

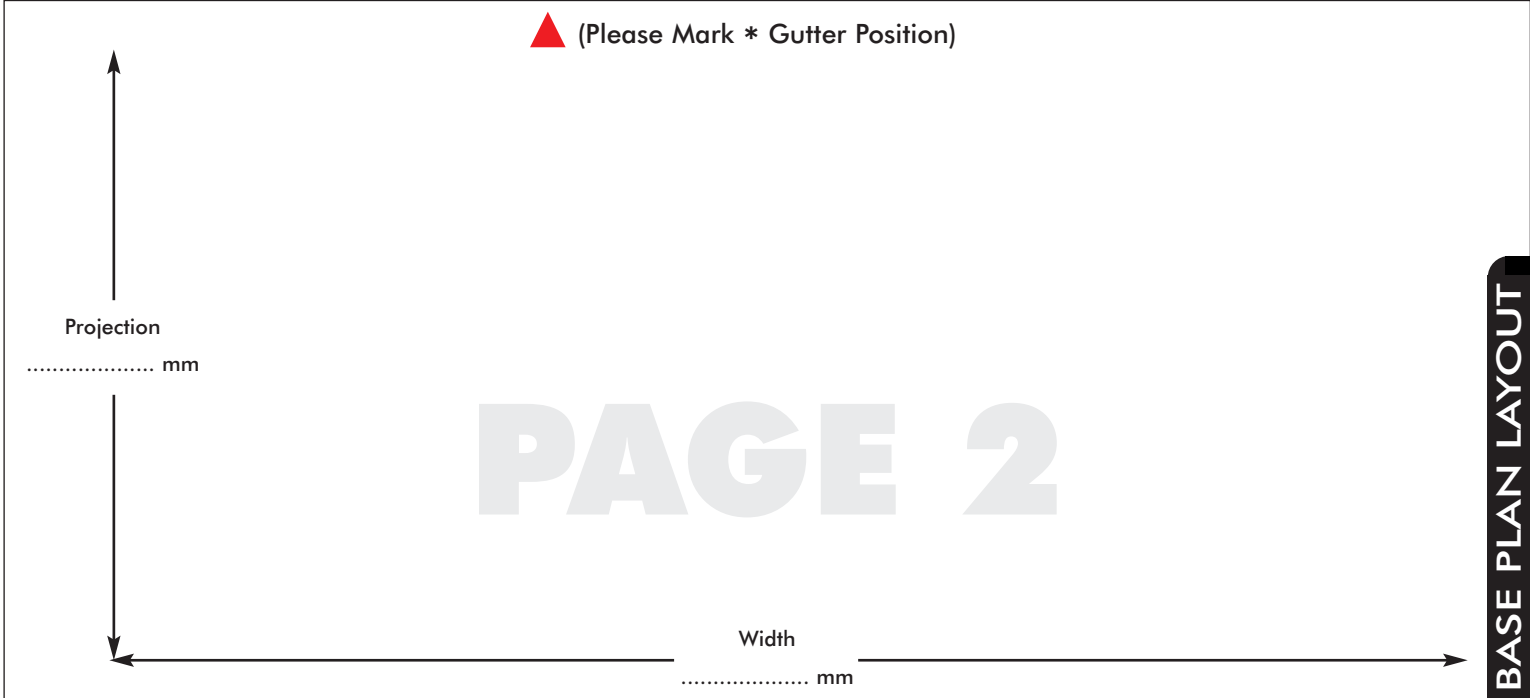

▲ **CONSERVATORY TYPE**

- Lean To
- Victorian
- Edwardian (Double Ended)
- Gable
- 'P' Shape (etc)
- Wendland Modular
- 2.5° Plastic Fittings (up to 4 metres)

▲ **CONSERVATORY FRAME GLAZING**

- Glazed Glass Type
- Unglazed Low E

▲ **CONSERVATORY COLOUR**

- White
- Cherrywood Cherrywood on White
- Rosewood Rosewood on White

SPECIAL REQUIREMENTS

All frames will have standard fittings, gaskets and bead as specified in the Trade price List, unless stated above.
 All 58mm frames glass supplied 4/16/4mm toughened clear and 70mm frames glass supplied 4/20/4 toughened clear.
 Please state if Low E glass required

▲ **SURVEY QUERIES**

- Gutter Required Y N
- Gutter Position (mark on base plan) *
- Dwarf Wall Height if applicable mm
- Is Overall Width Ext Brick/Ext Frame/Int Cill
- Is Overall Projection Ext Brick/Ext Frame/Int Cill
- Height Restriction or Pitch mm/°

▲ **DOORS (VIEWED OUTSIDE)**

- Door Hung Left Y Right Y
- Open In Y Open Out Y
- Master Leaf (Double Doors) Left Y Right Y

▲ **ROOF GLAZING**

- Polycarbonate ... Y Glass ... Y Unglazed ... Y

▲ **POLYCARBONATE**

- Clear 25mm or 32mm Bronze 25mm or 32mm
- Opal 25mm or 32mm Bronze/Opal 25mm
- Athermic/Opal 25mm or 32mm

▲ **GLASS** (standard 24mm clear toughened)

- Other please specify Y
 (If unglazed CAD sizes will be provided)

▲ **ROOF EXTRAS** (Show Position of Vents on Plan)

- Roof Vent ... Y Manual ... Y Electrical ... Y
- Electrical with Thermostat and Rain Sensor ... Y

SIGNED

ON BEHALF OF